



Panic & Emergency Exit Device

Manufacturer



System Costar Sina Co. was established in 2006 in the field of technical engineering and educational services, in 2013 after deployment in Hamadan Science and Technology Park, Continued its activities in the field of design and manufacture of panic exit device, and as the first manufacturer of Push bar Panic Latch in Iran, The product was marketed with SSILAN registered brand.


Providing high quality product at reasonable prices and providing distinct after sales services to customers is one of the important goals of the company.

And With the efforts of all our colleagues, we hope to have a good share in providing our customers with the desired products and services





1-2	Push Bar Panic Latch	SGS 100
3-4	Lock	SGS 150
5-6	Touch Bar Panic	SGS 200
7-8	Touch Bar Panic	SGS 300
9-10	Touch Bar Panic (two locking point)	SGS 400
11-12	Push Bar Panic Interior Lock	SGS 800
13-14	Push Bar Panic Latch (metal)	SGS 850
15-16	Metal Handle	SGS2100

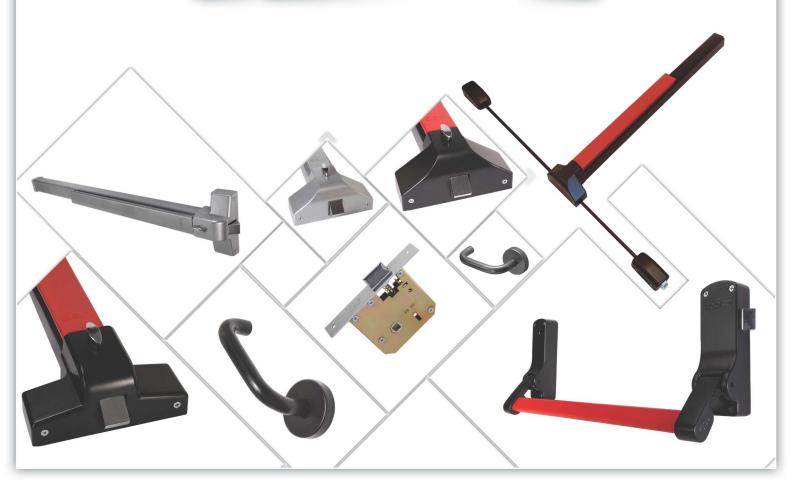





Push Bar Panic Latch

SGS100

Application

- Suitable for Single Doors
- Suitable for First Opening Leaf of Double Doors
- Suitable for Smoke / Emergency Exit Doors

Specification

- Compliance with EN 1125 Standard
- Single Point Locking
- Body is Aluminum
- Keeper & Latch are Steel
- Horizontal Bar is Metal / Aluminum
- Epoxy Powder Coating

Standard Colours

- Metallic Silver
- Black & Red










Has a Pantent Certificate





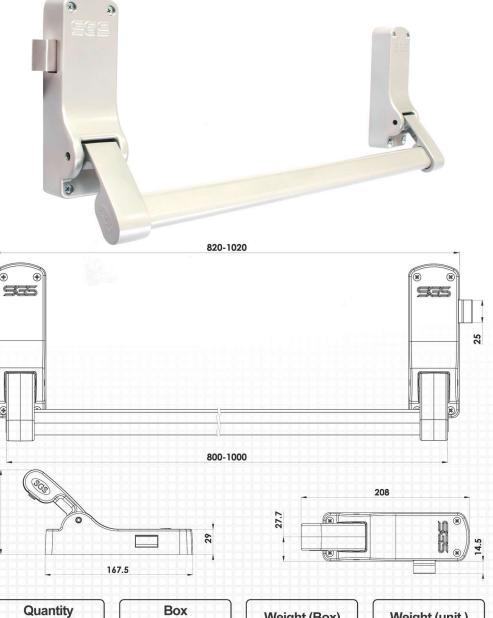

	Quantity In a Box	
Body	12	

12

12

Bar

Dimensions

45.5*31*21.5 cm

112*14*6 cm

Weight (Box)

12.2 kg

7.5 kg

Weight (unit)

0.97 kg

0.61 kg







Lock

SGS150

Application

- Suitable for LH/RH Doors
- Suitable for Fire / Emergency Exit Doors

Specification

- Lockeing Mechanism are Steel
- Body & Internal Mechanism Coated with Chrome
- Nickel-Plated Metal Cover and Retainer

Standard Colours

Yellow & White












Panica Solitonia Solitonia







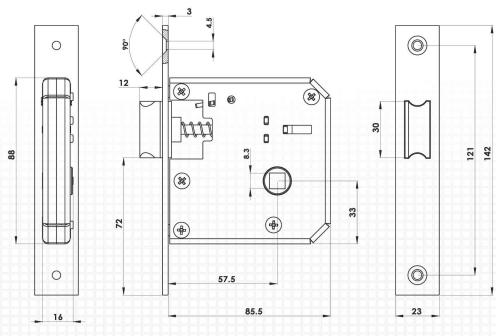

Quantity In a Box

60

Box Dimensions

45.5*31*21.5 cm

Weight (Box)

19.6 kg

Weight (unit)

0.3 kg



PANIC STATE OF THE STATE OF THE



Touch Bar Panic

SGS200

Application

- Suitable for Single Doors
- Suitable for First Opening Leaf of Double Doors
- Suitable for Fire / Emergency exit Doors

Specification

- Compatible with EN 1125 Standard
- Single Point Locking
- Body, Keeper & Latch are Steel
- Epoxy Powder Coating

Standard Colours

- Metallic Silver
- Black & Red













Has a Pantent Certificate







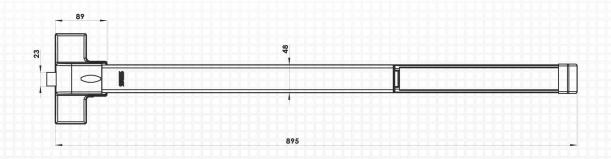

Quantity In a Box

6

ntity Box Dimensions

91*36*26 cm

Weight (Box)

18.8 kg

Weight (unit)

3 kg



SANICE STATE STOO



Touch Bar Panic

SGS300

Application

- Suitable for Single Doors
- Suitable for First Opening Leaf of Double Doors
- Suitable for Fire / Emergency Exit Doors

Specification

- Compatible with EN 1125 Standard
- Single Point Locking
- Body, Keeper & Latch are Steel
- Epoxy Powder Coating

Standard Colours

- Metallic Silver
- Black & Red













Has a Pantent Cartificate







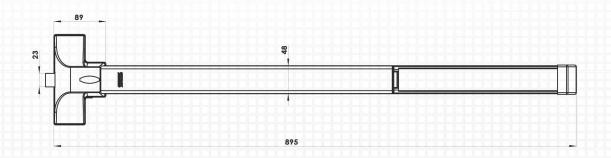

Quantity In a Box

6

Box Dimensions


91*36*26 cm

Weight (Box)


18.8 kg

Weight (unit)

3 kg

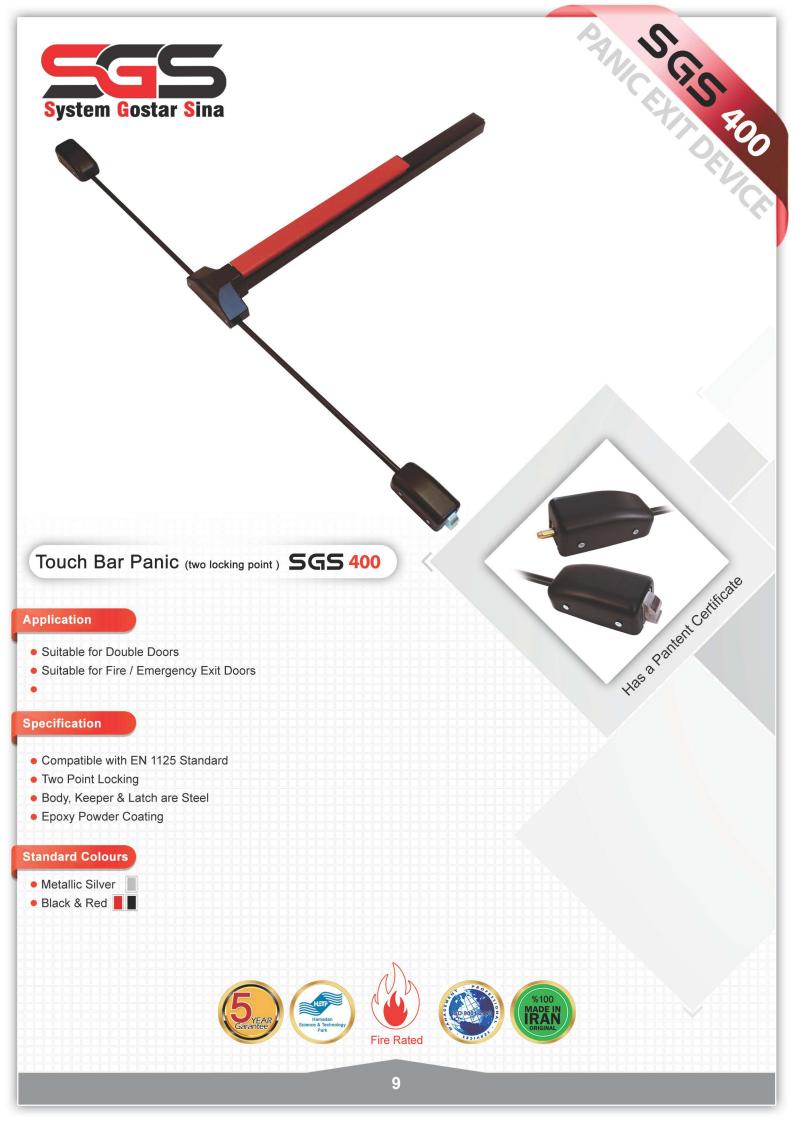



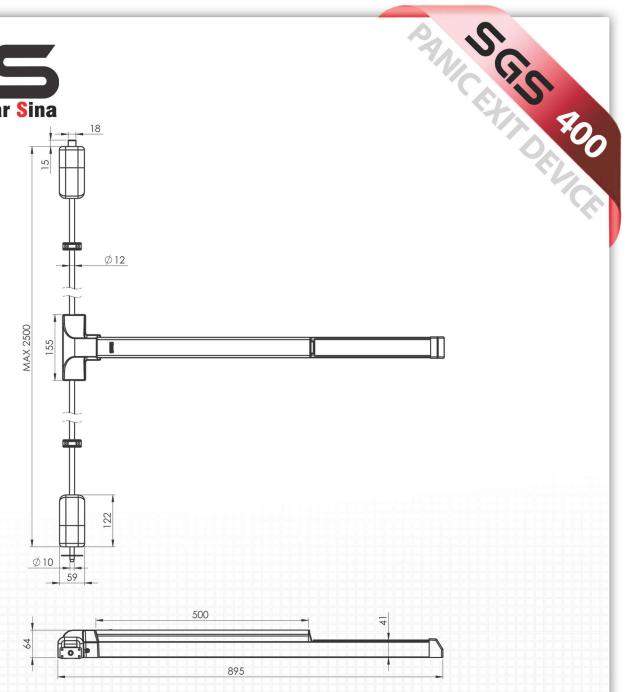

Quantity Box Weight (Box) Weight (unit) In a Box **Dimensions** Body 6 23.3 kg 3.75 kg 91*36*26 cm Quantity In a Box Box Dimensions Weight (Box) Weight (unit) Bar

126*15*6 cm

6+6

3.2 kg

0.45 kg



Push Bar Panic Interior Lock 5G5800

Application

- Suitable for Single Doors
- Suitable for First Opening Leaf of Double Doors
- Suitable for Fire / Emergency Exit Doors

Specification

- Compliance with EN 1125 Standard
- Single Point Locking
- Panic Body is Aluminum
- Locking Mechanism are Steel
- Panic Coated with Epoxy Powder
- Locking Mechanism Coated with Chrome

Panic Colours

Metallic Silver

Black & Red



Lock Colours

Yellow & White


















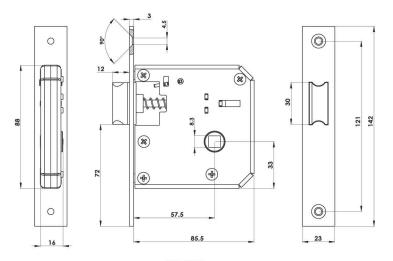

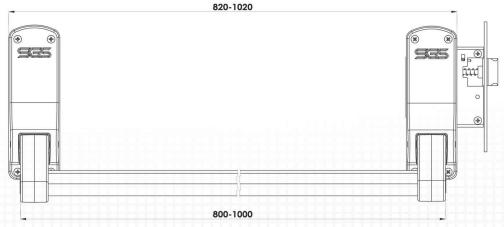

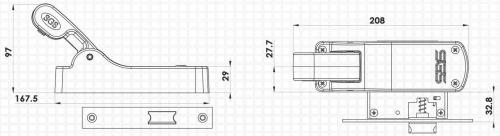

Quantity Box Weight (Box) Weight (unit) In a Box **Dimensions Body** 14.7 kg 1.17 kg 12 45.5*31*21.5 cm 0.61 kg Bar 12 112*14*6 cm 7.5 kg







Push Bar Panic (metal)

SGS850

Application

- Suitable for Single Doors
- Suitable for First Opening Leaf of Double Doors
- Suitable for Fire / Emergency Exit Doors

Specification

- Compliance With EN 1125 Standard
- Single Point Locking
- Body is Aluminum
- Body & Keeper & Latch are Steel
- Horizontal Bar is Metal / Aluminum
- Epoxy Powder Coating

Standard Colours

- Metallic Silver
- Black & Red













Has a Pantent Certificate



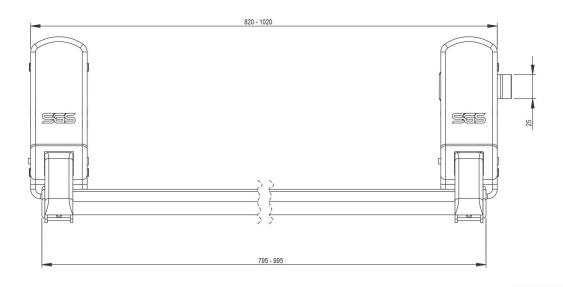

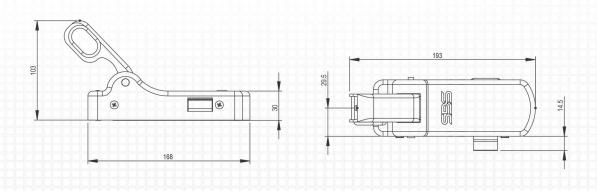

	Quantity In a Box	Box Dimensions	Weight (Box)	Weight (unit)
Body	12	45.5*31*21.5 cm	17.4 kg	1.45 kg
Bar	12	112*14*6 cm	7.5 kg	0.61 kg



STATE OF THE PARTY OF THE PARTY



Metal Handle

SGS 2100

Application

- Suitable for LH/RH Doors
- Suitable for Fire / Emergency Exit Doors

Specification

- Body & Mechanism are Steel
- Epoxy Powder Coating
- Conect the Door with 3 Screws

Standard Colours

- Silver
- Black



















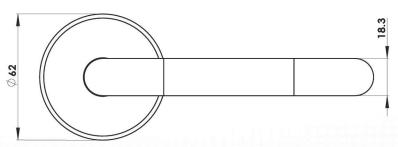

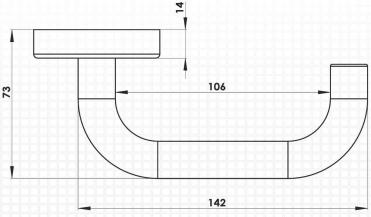

Quantity In a Box

Box **Dimensions**

Weight (Box)


Weight (unit)

48

45.5*31*21.5 cm

12.6 kg

0.23 kg

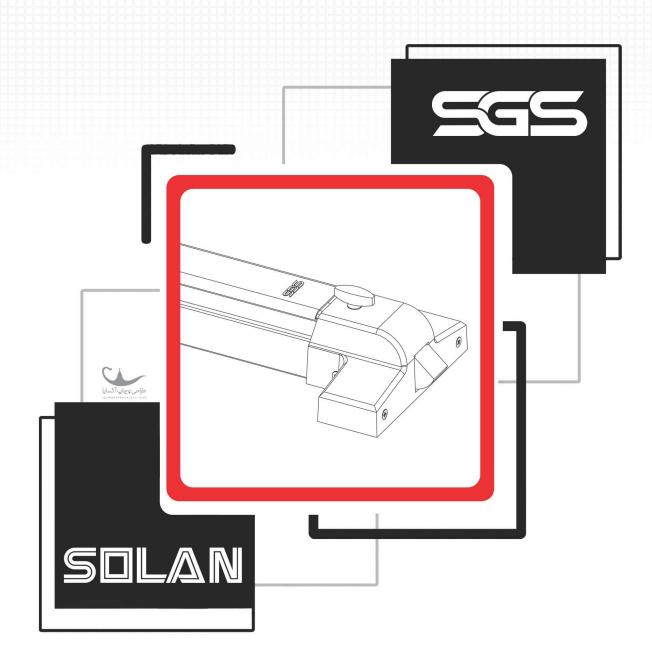

Office: Hamedan Science & Technology Park, hamedani Blvd , HAMEDAN , IRAN Factory: No 195 , 33nd St, 3rd Blvd , Bou Ali Industrial Town , HAMEDAN , IRAN

- **(±)** +988138218906
- +989022112283
- +988134384010
- **(**+988134384020
- www.sgsina.ir
- info@sgsina.ir
- o sgs_panic_device